

## TOPAKUSTIK® type 8/3 M - data sheet


TOPAKUSTIK® type 8/3M - 19% is a high absorbing type.

This type convinces with a large open surface and a good strength and mechanical resistance.






### Planks

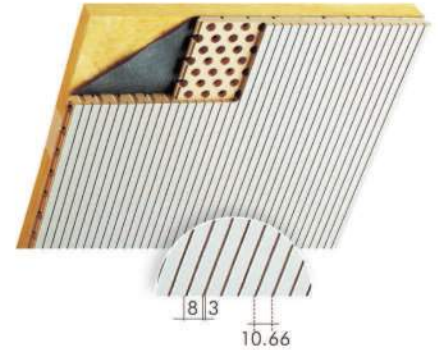
Thanks to the precise tongue and groove connection, planks result in an attractive surface with joint-free appearance, because the connection joint matches the dimension of the grooves. The planks permit simple and flexible assembly. They can be installed by stapling to timber battens. An installation with H/T-profiles and clips is not possible.



### symbols

-  Paint
-  Wood veneer
-  Melamine

Fire Category B2 (CH 4.3)/D-s2, d0			Fire Category B1 (CH 5.3)/B-s2, d0		
Paint 16 mm 	Wood Veneer 17 mm 	Melamine 16 mm 	Paint 16 mm 	Wood Veneer 17 mm 	Melamine 16 mm 
Standard					
2780 x 128	2780 x 128	2780 x 128	2780 x 128	2780 x 128	2780 x 128
3640 x 128	3640 x 128			3640 x 128	
4080 x 128		4080 x 128	4080 x 128		4080 x 128
custom lengths are also available					

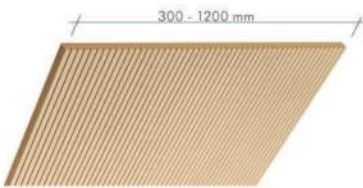


### Panels


Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edge treatments and endings.

### sound absorption values







8/3 M-9.5%\*



8/3 M-19%\*



Graphics: Sound absorption in suspension height 215 mm and 55 mm.

Fire Category B2 (CH 4.3)/D-s2, d0			Fire Category B1 (CH 5.3)/B-s2, d0		
Paint 16 mm 	Wood Veneer 17 mm 	Melamine 16 mm 	Paint 16 mm 	Wood Veneer 17 mm 	Melamine 16 mm 
max.					
3640 x 1216	3640 x 1216	3640 x 1216	3640 x 1216	3640 x 1216	3640 x 1216
ideal = means optimal use of MDF core - custom lengths are also available					
2040 x 992 / 640	2040 x 992 / 640	2040 x 992	2040 x 992	2040 x 992	2040 x 992
2780 x 992 / 640	2780 x 992 / 640	2780 x 992	2780 x 992	2780 x 992	2780 x 992
3640 x 640	3640 x 640			3640 x 640	

