



TOPAKUSTIK® type Caro - data sheet





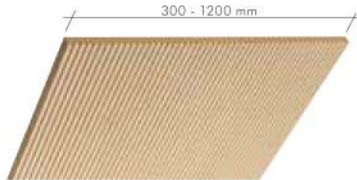

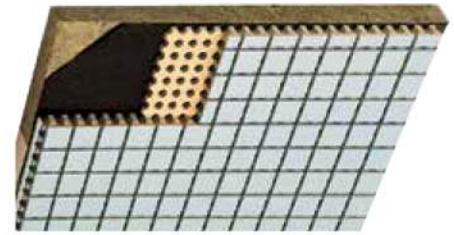

TOPAKUSTIK® type Caro - the distinct square one

The very high open surface of 15% achieves an accordingly high effect in absorption. Caro is mainly used as a ceiling element and has a distinct effect in colour lacquered version, thus being perfect for difference designs. It is very good for especially emphasizing a surface element.







Panels

Panels are used for removable or fixed ceilings and walls with visible joints. Panels can be provided with a number of different edges and are also suited for cabinet fronts and room dividers.

Fire Category B2 (CH 4.3) / D-s2, d0			Fire Category B1 (CH 5.3) / B-s2, d0			Fire Category A2 (CH 6q.3)	
Paint 16 mm 	Wood Veneer 17 mm 	Melamine 16 mm  	Paint 16 mm 	Wood Veneer 17 mm 	Melamine 16 mm  	Paint 16 mm 	Wood Veneer 17 mm 
max.							
3640 x 1216	3640 x 1216	3640 x 1216	3640 x 1216	3640 x 1216	3640 x 1216	3080 x 1216	3080 x 1216
ideal = means optimal use of MDF core - custom lengths are also available							
2040 x 992 / 640	2040 x 992 / 640	2040 x 992	2040 x 992	2040 x 992	2040 x 992	1540 x 608	1540 x 608
2780 x 992 / 640	2780 x 992 / 640	2780 x 992	2780 x 992	2780 x 992	2780 x 992	3080 x 608	3080 x 608
3640 x 640	3640 x 640			3640 x 640			




symbols

-  Paint
-  Wood veneer
-  Melamine



sound absorption values

Caro 29/3 M	a w	Euro	NRC
215 mm	0,85	B	0,84
55 mm	0,80 M	B	0,85

Surface:	   
Grooving:	28/4 M + 29/3 M
Fire category core panel: DIN/CH/EN	B2 + B1 / 4.3 + 5.3 / D-s2, d0 + B-s2, d0
Formats/Dimensions:	Panels 3640 x 1250 mm

